

COMPLESSO DI EMERGENZA PER LAMPADE FLUORESCENTI T8, T5 e PL

EMERGENCY FOR FLUORESCENT LAMPS T8, T5 and PL

CONFORME ALLE NORME

IN CONFORMITY WITH NORMATIVES

EN 55015, EN 61547, EN 61000-3-2, EN 61347-1,
EN 61347-2-3, EN 61347-2-7







50-60 Hz - 230 Vac
Corrente di alimentazione 40 mA
Funzionamento luce continua o solo emergenza
Morsetto a innesto rapido
Contenitore in materiale plastico autoestinguente VO
Funzionamento con alimentatori elettromeccanici ed elettronici
Collegamento batteria e led ad innesto rapido

Lunghezza massima tra emergenza e lampada 2 m

50-60 Hz - 230 Vac
Supply current 40 mA
Emergency or continuous light functioning
Screwless terminal
Self extinguishing plasting box VO
Working with electromechanical and electronic ballast
Batteries and led connection with quick graft

The distance between the inverter and lamps must not exceed 2 m

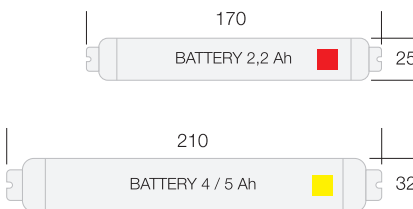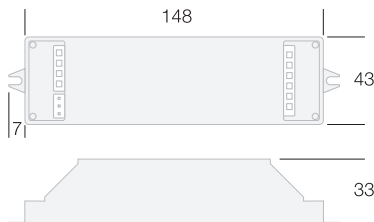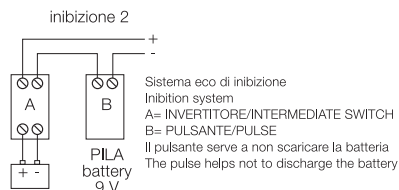

CODICE	POTENZA	FATTORE DI FLUSSO	BATTERIA Ni-Cd	AUTONOMIA	PESO	QUANTITA'
CODE	POWER	LIGHTING PERCENTAGE	BATTERY Ni-Cd	AUTONOMY	WEIGHT	QUANTITY
	Watt	%		h	gr	
VG 051 BP	18 - 36	20 - 18	2,2 Ah 3,6 V	2,0 - 1,0	450	9
VG 051 BG	18 - 36 - 58	16 - 12 - 8	4,0 Ah 3,6 V	3,0 - 2,0 - 1,0	650	9
VG 051 BS	18 - 36 - 58	16 - 12 - 8	5,0 Ah 3,6 V	4,0 - 3,0 - 1,30	650	9
BA 032 NC	batteria di ricambio Ni-Cd / 3,6 / 2,2 Ah				210	1
BA 034 NC	batteria di ricambio Ni-Cd / 3,6 / 4 Ah				400	1
BA 035 NC	batteria di ricambio Ni-Cd / 3,6 / 5 Ah				400	1

SCHEMI DI COLLEGAMENTO PER COMPLESSO DI EMERGENZA

CONNECTING DIAGRAM FOR EMERGENCY UNIT

Collegare il complesso di emergenza ad una distanza massima, dalla lampada, di 2 m. I fili di connessione linea diretta non devono mai essere interrotti, ad eccezione di un sezionatore prova impianto. Posizionare il complesso e la batteria nella zona a temperatura più bassa, evitare il montaggio vicino al reattore. La spia luminosa di carica batteria (led), dove possibile deve essere visibile all'esterno.

Ad installazione ultimata, ricaricare le batterie per almeno 24 h.

Il prodotto contiene materiali che possono essere nocivi se dispersi nell'ambiente. Per le operazioni di manutenzione, disinserire ogni alimentazione, comprese le batterie. Per il collegamento lampada singola, cortocircuitare il punto A con il punto B, eliminando lo spazio tratteggiato. Effettuare periodicamente, ogni 4/5 mesi, un ciclo di funzionamento. Sostituire la batteria dopo 4/5 anni o dopo 400 cicli di funzionamento.

Connect the emergency unit to a maximum distance of 2 m from the lamp. The wires connecting direct line must not be interrupt, with the exception of the insertion of a "system test button". Place the battery and the lighting body on lowest temperature zone and avoid placing near the power supply. If possible the indicator light (led) showing the battery charge, should be visible from outside.

Recharge batteries for at least 24 h after installation.

The product contains materials that could be harmful if not disposed properly. Disconnect all power supply, including the battery, for any kind of maintenance. Connect point A to point B and delete the dotted line for the one lamp connection. It is advisable effect periodically (every 4/5 months) a cycle of operation. Replace the battery after 4/5 years or after 400 cycle of operations.

①



Funzionamento con doppia lampada tipo compatto
Compact type double lamp operation

Emergenza 1 lampada - Emergency 1 lamp

②



Collegamento solo emergenza
Connection for emergency operation only

③



Funzionamento con lampada circolare
Circular lamp operation

Emergenza 1 lampada - Emergency 1 lamp

④



Funzionamento con una lampada
One lamp operation

Emergenza 1 lampada - Emergency 1 lamp

⑤



Funzionamento con doppia lampada
Double lamp operation

Emergenza 1 lampada - Emergency 1 lamp

⑥



Collegamento con ballast elettronico monolampada
Electronic ballast connection one lamp

⑦



Collegamento con ballast elettronico bilampada
Electronic ballast connection twin lamp

Emergenza 1 lampada - Emergency 1 lamp

⑧



Collegamento con ballast elettronico bilampada
Electronic ballast connection twin lamp

Emergenza 1 lampada - Emergency 1 lamp