






tecnoSwitch

centrale radio comando serrande, garage


RADIO SHUTTERS, GARAGE
CENTRAL CONTROL

50-60 Hz - 230 Vac
 Consumo scheda in stand-by 1,5 W
 Corrente assorbimento motore max 4 A
 Portata contatti relè: 8 A
 Potenza motore max 1 hp
 Tempo di corsa impostabile
 Ricevitore integrato per radiocomandi a codice fisso compatibili
 Frequenza di ricezione 433 MHz
 Morsetto esterno ad aggancio rapido
 Abbinabile ai radiocomandi: TE002CF, TE003UN
 433 Mhz - 20BIT - codice fisso
 2 modalità di funzionamento selezionabili da dip-switch

Cassetta IP 56 non inclusa

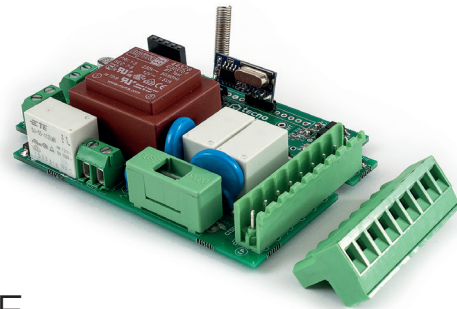


Genio 2-E



50-60 Hz - 230 Vac
 Power consumption in stand-by 1,5 W
 Current motor 4 A max
 Max relay load: 8 A
 Engine power max 1 hp
 Time adjustable
 Integrated receiver for fixed code remote controller compliant
 Reception frequency 433 MHz
 Quick connection plug
 Can be combined with the remote control TE002CF, TE003UN
 433 Mhz - 20BIT - fixed code
 2 working mode selectable by dip-switch

IP 56 box not included

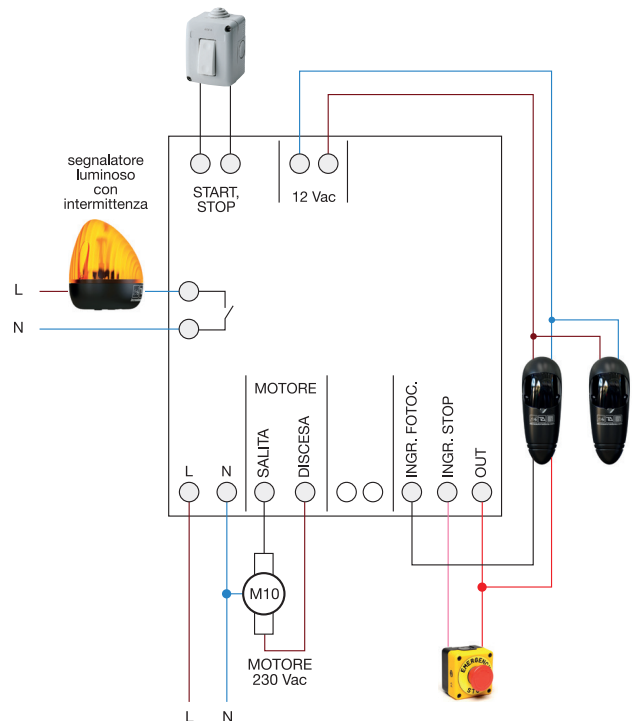

CODICE	POTENZA MOTORE	GRADO DI PROTEZIONE	CORRENTE ASSORBIMENTO	FREQUENZA	PESO	NOTE
CODE	ENGINE POWER	PROTECTION LEVEL	MAX CURRENT	FREQUENCY	WEIGHT	NOTE
TA343RF	1 hp	IP00	4 A	433 MHz	145 gr	centrale di comando / radio blinds central
TA101CA		IP56			56 gr	cassetta liscia / box 100 x 100 x 50 mm