







temporizzatore elettronico luce scale

ELECTRONIC STAIRCASE TIMER

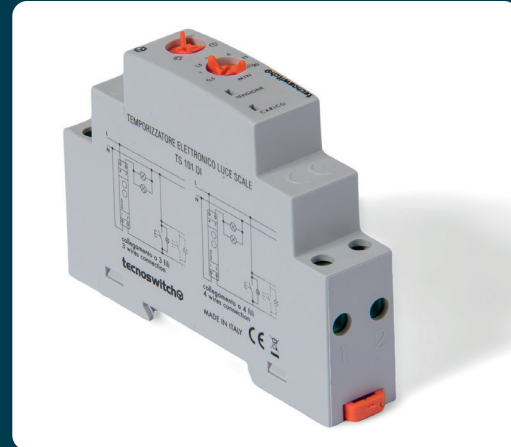

50-60 Hz - 230 Vac
 Contenitore modulare 1 DIN autoestinguente VO
 Adatto per impianti a 3 o 4 fili, con riconoscimento automatico
 Scala tempi da 0,5 a 20 minuti
 Utilizzabile con:
 max 30 pulsanti luminosi da 30 < 1 mA (incandescenti);
 max 10 pulsanti luminosi LED
 Indicatori led: rosso = relè ON verde = alimentazione ON
 Commutazione allo zero di tensione per ridurre l'usura dei contatti
 Funzione Pulizia scale

50-60 Hz - 230 Vac
 Modular case in Din rail, self-extinguishing VO
 Suitable for 3 or 4 wire systems, with automatic identification
 Time regulation from 0,5 to 20 minutes
 Usable with:
 max 30 illuminated push-button 30 < 1 mA (incandescent);
 max 10 illuminated push-button LED
 Led indicators: red = relay ON green = voltage ON
 Zero crossing switching protect relay contacts from usury
 Stairs cleanig function

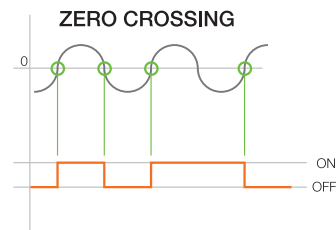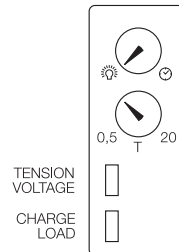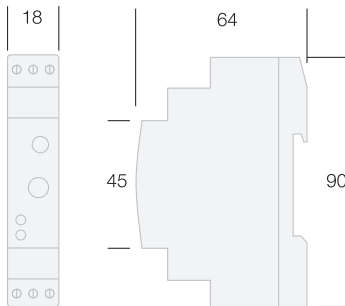

| CODICE | INCANDESCENZA | ALOGENA | FLUORESCENZA | LED 230V | PULSANTI LUMINOSI COLLEGABILI | TIPO | PESO |
|----------------|---------------|--------------|--------------|--------------|------------------------------------|--------------------|----------|
| CODE | INCANDESCENT | HALOGEN | FLUORESCENT | LED 230V | MAX N° OF ILLUMINATED PUSH-BUTTONS | TYPE | WEIGHT |
| TS101DI | Watt 2000 | Watt 2000 | Watt 500 | Watt 300* | 30 incandescenti / 10 LED | unipolare 1 NO 16A | gr 60 |