



DAILY TIMER-THERMOSTAT FOR RECESSED INSTALLATION - BOTTICELLI - CR315 230V~

EN 60730-2-9 EN 60730-1 EMC - LVD

Install at an height at about 1,5 m above the floor, avoiding heat sources: windows and doors*

At the first switch-on, set the time with the + and - keys and press ok

Automatic switch-on when batteries are inserted.

Default settings: Heating Operation, 5°C Antifreeze, Comfort Temp. 22°C, Diff. 0.3°C.

Economy Temp: 10°C, Correction Temp. 0,0°C.

When system is working or is animates.

Switch ON / OFF:

Press


Manual or Automatic operation:

Press until it appears or on the display.

Comfort temperature setting:

From stand-by tap , the selected value appear on the right side of the display.

To activate it, move the time indicators upwards.



MENU: Navigate inside the various functions of the Menu by pressing the selection keys

1. TIME SETTINGS:

In the Menu select the and press **OK**, set the hour and confirm, then set the minutes and press **OK**.

2. ECONOMY TEMPERATURE:

In the Menu move to the and confirm. Select the ECONOMY temperature and confirm.

3. COOLING:

In the Menu move to the and press **OK** to activate.

4. HEATING:

In the Menu move to the and press **OK** to activate.

5. USAGE STATISTICS:

Scroll with the navigation keys to view the statistics.

6. The reset is carried out keeping the keys pressed at the same time and ok for more than 5 seconds on the display the writing **rst** will appear (factory setting)

7. PARAMETER SETTINGS:

7.1 ANTIFREEZE:

It's important to avoid too low temperature damage.

From the Menu click on the icon and confirm; then set the value and press **OK**.

Below 2 °C the antifreeze protection is lost and **OFF** appears.

7.2 THERMAL DIFFERENTIAL dIFF:

Repeat step 7.1, press for 3s and set the value through the selector, press **OK** to confirm.

7.3 MEASURED TEMPERATURE CORRECTION corr:

Repeat steps 7.1 and 7.2, press for 3s and set the correction using the selector; confirm.


Device must be installed by a qualified person.

Device must be installed by a qualified person. For more and detailed information, see the installer manual at [tecno**switch**.com](http://tecnoswitch.com)

Tecno Switch reserves the right to make changes to its products in each moment and without further notice.

Tecno Switch declines all responsibility for damage to things or persons derived from an incorrect or improper use of its products.

Electrical connections:

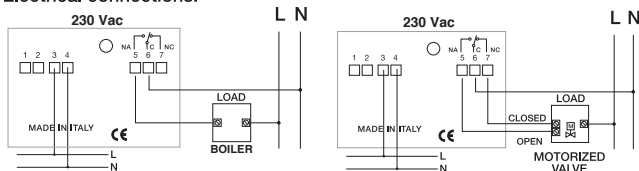

tecno**switch**

Pursuant to Legislative Decree No. 49 of March 14, 2014 'Implementation of Directive 2012/19 / EU on waste electrical and electronic equipment (WEEE)', The 'crossed out wheeled bin' WEEE symbol on the appliance show that the product at the end of its useful life must be collected separately from other waste. Therefore, the user must provide the equipment with the essential components at the recycling centre for electronic and electrotechnical devices or return it to the dealer when you purchase an equivalent appliance in one to one reason, or 1 to zero for equipment with a side lower than 25cm. The correct recycling helps to avoid possible negative effects on the environment and on health favoring the recycling of the materials that make up the equipment. The illegal disposal of the product by the user involves administrative sanctions as per Legislative Decree No. 49 of March 14, 2014.

