



WALL MOUNTED TOUCH THERMOSTAT - TE035VB 230 VAC

COMMANDS AND INDICATIONS

KEYS LEGEND Fig.1



1. Menu
2. Increase
3. Decrease
4. Confirm
5. Scrolls the next icons
6. ON/OFF

DISPLAY LEGEND Fig.1

7. Energy consumption savings indicator
8. Set temperature
9. Cooling mode
10. Heating mode
11. Ambient Temperature
12. Set Reduction temperature ON
13. Set Comfort temperature ON

14. Frost protection
15. OFF

Note: when the thermostat is in Stand-by press to start the backlight. Now it can be set.

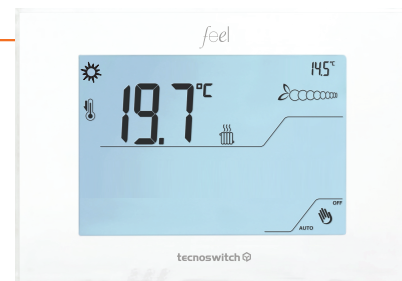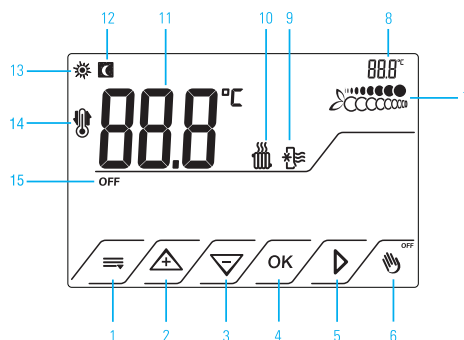

INSTALLATION

The device must be positioned about 1.5 meters above the floor, avoiding heat sources, windows and doors. It must be installed on the wall or on recessed boxes with 2 or 3 modules, in dry places.

To install the thermostat it is necessary:

- Unhook the base from the thermostat. Fig.1A e 2A
- Fix the base to the wall. Fig.3A
- Connect the external temperature probe.
- Hook the base to the wall. Fig.4A

WIRING DIAGRAM

- Connect the load to the terminlas following the wiring diagram. Fig.1B e 2B

ASSEMBLY INSTRUCTION

Fig.1A




Fig.2A




Fig.3A




Fig.4A




Fig.1B


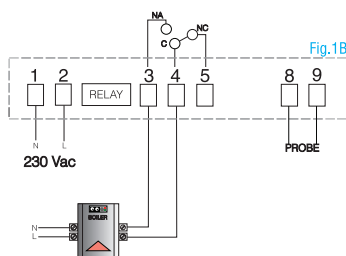


Fig.2B

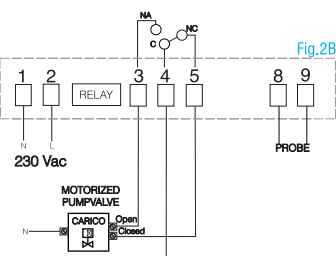

FACTORY SETTING

For faster use, the thermostat is supplied with set programs :

- Heating program:
Reduction temperature a 14°C
Comfort temperature a 22°C
- Cooling Program
Reduction temperature a 28°C
Comfort temperature a 24°C
- Frost protection function: + 5° C settable, active only in heating mode.

FUNCTION ON / OFF

Press for at least 3 seconds

SET HEATING / COOLING

Set Cooling

Press the icons in sequence: → → up to position on the icon → confirm with OK.

Set Heating

Press the icons in sequence: → → up to position on the icon → confirm with OK.

SYSTEM ACTIVATION SIGNALING

When the icon or is animated, the system is active.

SET COMFORT / REDUCTION TEMPERATURE

HEATING / COOLING MODE

You can set temperature between +2 and + 35° C in steps of 0.1 ° C by pressing or . Make sure that the icon is active / make sure that the icon is active. Press the icons in sequence: → → up to position on / → press OK → use or to set desired Reduction or Comfort value → confirm with OK.

LOCK SETTING

The thermostat is provided with a 3 digit Lock Code.

Press the icons in sequence: → (+) for 3 seconds up to position on **PAS** → use or to set the first digit → press → use or to set to other two digits → confirm with OK. To deactivate it, repeat the same steps.

RESET

Press the icons in sequence: → (+) for 3 seconds and **rSt** appears.

For more information consult the installer manual on our website (tecnoswitch.com) .

