

LAMPADA SEGNAPASSO MULTICOLOR IP65 DA INCASSO PER CASSETTE 506


IP65 MULTICOLOR WHITE LED STEPLIGHT FOR 506 BOXES



CONFORME ALLE NORME

IN CONFORMITY WITH NORMATIVES


EMC, LVD, RoHS, ERP, EN55015, EN61000-3-2, EN61000-3-3, EN61547, EN60598-1, EN60598-2-2, EN62031, EN62493



COPERNICO

230 Vac - 50/60 Hz
Potenza lampada 5 W
Scelta colore luce: Bianco Caldo/Neutro/Freddo con switch integrato
Ideale per cassette standard 506
Agganci per fissaggio in cartongesso inclusi
Corpo centrale in policarbonato
Contiene due placche in alluminio anodizzato (silver e bianca)
Schermo in PMMA satinato
Collegamento con fili uscenti dal retro
Ridotta emissione di calore

230 Vac - 50/60 Hz
Lamp power 5 W
Light color choice: Warm/Natural/Cold White with integrated switch
For 506 standard box
Hooks for plasterboard installation included
Central case in polycarbonate
Contains two anodized aluminum plates (silver and white)
Satin PMMA front glass
Rear wires for electrical connection
Reduced heat emission

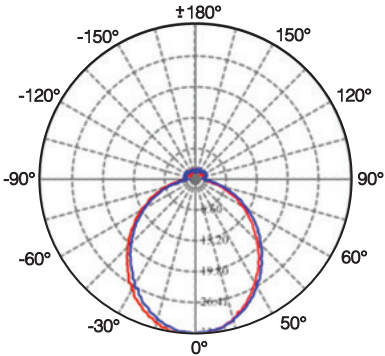

CODICE	POTENZA LED	COLORE LED	FLUSSO LUMINOSO	CRI	DURATA LED	LUNGHEZZA CAVI	PESO
CODE	LED POWER	LED COLOUR	LUMINOUS FLUX		LED LIFESPAN	CABLE LENGHT	WEIGHT
	W	K	lm		h	cm	gr
LA906BD	5	3000/4500/6500	650	>80	>30.000	15	310

INSTALLAZIONE

1. Scollegare l'alimentazione elettrica
2. Rimuovere il tappo sul retro e selezionare tramite l'interruttore il colore desiderato
3. Cablare la lampada all'impianto elettrico
4. Installare la lampada in una cassetta standard 506
- 4.1. Per installazione su muro o cartongesso montare i ganci forniti sul retro della lampada
- 4.2. Installare la lampada su parete o cartongesso
5. Montare la placca del colore desiderato alla lampada
6. Ricollegare l'alimentazione elettrica

INSTALLATION

1. Disconnect the power supply
2. Remove the cap on the rear side of lamp and select preferred colour by the switch
3. Connect the lamp to the electrical system
4. Install the lamp in 506 standard box
- 4.1. For plasterboard or wall installation mount supplied hooks on the rear side of lamp
- 4.2. Mount the lamp on a wall or plasterboard
5. Mount the plate of the desired color to the lamp
6. Reconnect the power supply

