



Sensore infrarossi di prossimità a sfioramento per armadi

Infrared proximity sensor for wardrobes

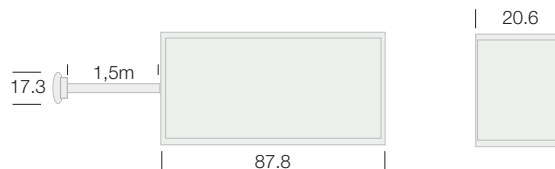

230 Vac - 50-60 Hz
Carico max incandescenza 500 W
Carico max LED 230/fluorescenza 200W
Corrente nominale 5A
Distanza di rilevamento 5-6 cm
Grado di protezione IP20
Lunghezza cavo sensore 1,5m

230 Vac - 50-60 Hz
Max load incandescent 500W
Max load LED 230/fluorescent 200W
Rated current 5A
Detection distance 5-6 cm
IP rating IP20
Sensor cable length 1,5m

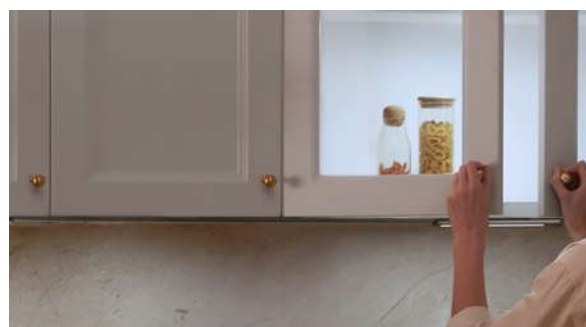

Adatto per cabine armadio, ante o porte. Il suo stato è controllato dall'apertura e dalla chiusura di una porta o anta. Quando viene aperta, il sensore rileva il movimento e accende il carico che rimarrà acceso fino alla chiusura della porta/anta.

Suitable for wardrobes, cabinet doors, or regular doors. Its state is controlled by the opening and closing of a door or panel. When opened, the sensor detects the motion and turns on the load, which remains on until the door/panel is closed.

CODICE	FUNZIONAMENTO	COLORE	POTENZA MAX INCANDESCENZA	POTENZA MAX FLUORESCENZA	POTENZA MAX LED 230V	DISTANZA DI RILEVAZIONE	PESO
CODE	OPERATION	COLOUR	MAX INCANDESCENT POWER	MAX FLUORESCENT POWER	MAX POWER LED 230V	DETECTION DISTANCE	WEIGHT
			W	W	W	cm	gr
SE018BI	Apriporta / door opening sensor	Bianco / White	500	200	200	5-6	100